


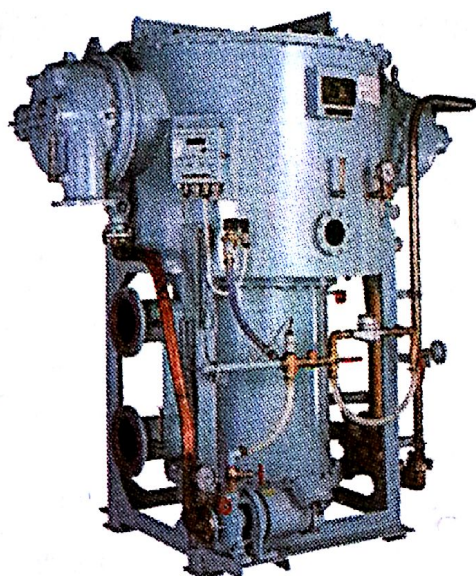


Code:195002

☸ 供应商: 3098

☸ Supplier: 3098

Type KE海水淡化装置 Fresh Water Generator

处理能力Capacity (t/24h)		3 ~ 50
含盐量Salinity of Distillate(ppm)		Below10
热消耗Heating consumption	× 10 ³ (kcal/h)	73 ~ 1203
	kW	85 ~ 1399
海水冷却温度Cooling Seawater Temperature (°C)		32
蒸汽管冷却水 Jacket Cooling Water	处理能力Capacity(t/h)	6.4 ~ 93
	输入温度Temperature Inlet(°C)	80
	输出温度Temperature Outlet(°C)	67.1 ~ 71.1
蒸馏泵 Distillate Pump	处理能力Capacity(m ³ /h)	0.3/1.2/2.5
	扬程Total Head(m)	20/30
	转速Speed(r/min)	3450
	马达功率Motor Output(kW)	0.4/0.75/1.5
喷射泵Ejector Pump	处理能力Capacity(m ³ /h)	10 ~ 120
	扬程Total Head(m)	48
	转速Speed(r/min)	3450/1750
	马达功率Motor Output(kW)	3.7 ~ 30.0
电源Power Supply	马达Motor	AC440V 60Hz 3phase
	盐度指示器Salinity Indicator	AC100 ~ 220V 60Hz 1phase
净重Net Weight(kg)		310 ~ 1480
工作重量Opetating Weight (kg)		350 ~ 1850
喷射泵重Ejector Pump Set (kg)		90 ~ 450

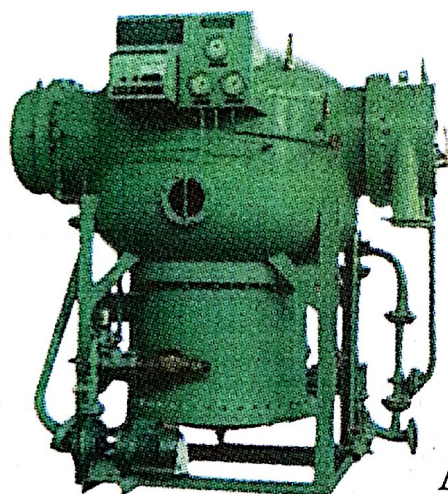

Code:195004

✱ 供应商: 2150

✱ Supplier: 2150

AFGU-1型海水淡化装置 Fresh Water Generator

型号Type		E1.5	E7	E15	S15	E25	S25	E36	S36	S50
造水量Capacity (m³/24h)		1.5/1	7/5	15/12	15/12	25/20	25/20	36/30	36/30	50/40
热消耗Heating Consumption (kW)		45/30	205/150	430/354	430/354	720/570	720/570	1030/860	1030/860	1430/1140
加热器 Heating Exchanger	流量 Flow Rate(m³/h)	6/2	28/12	58/31	58/31	87/48	87/48	131/78	131/78	160/90
	温差 Temp. Difference (Δt °C)	6.5/13	6.5/11	6.5/10	6.5/10	7/10	7/10	6.5/9.5	6.5/9.5	7.5/11.5
	压差 Pressure Loss (bar)	0.07/0.01	0.19/0.03	0.38/0.14	0.38/0.14	0.39/0.14	0.39/0.14	0.37/0.15	0.37/0.15	0.45/0.15
冷凝器 Condenser	流量 Flow Rate(m³/h)	4	16	35	35	44	44	77	77	100
	温差 Temp. Difference (Δt °C)	9/6	10.5/7.5	10/8	10/8	13.5/10	13.5/10	11/6	11/6	12/9.5
	压差 Pressure Loss (bar)	0.29	0.39	0.32	0.32	0.35	0.35	0.28	0.28	0.31



☼ 供应商：2204

☼ Supplier: 2204


反渗透海水淡化装置

Reverse Osmosis Fresh Water Generator


灵活的设计可以满足多种需用，包括商船、军船、工程驳船，海洋平台、岛屿和基建设施。Flexible design for multi-purpose applications, including merchant ships, navy warships, engineering barges offshore platforms, island water stations and on-shore facilities

型号 Type	造水量25℃ Capacity(t/Day)	外形尺寸长×宽×高 Dimension L×W×H(mm)	湿重 Wet Weight(kg)	总功率 Total Power (kw)
HSRO-02	2-3	1200×400×600	150	2.1
HSRO-05	5	1200×580×1450	300	3.5
HSRO-10	10	1550×800×1660	500	7
HSRO-15	15	1550×800×1660	550	9
HSRO-20	20	1850×1160×1930	900	13.5
HSRO-25	25	1850×1160×1930	900	13.5

造水机 Fresh Water Generator

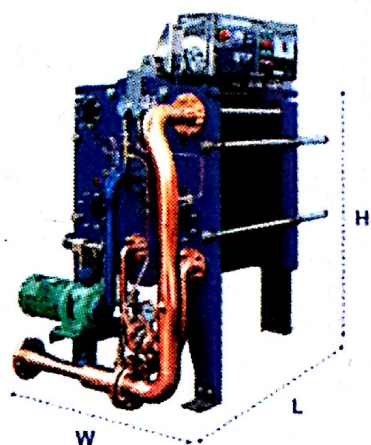

型号 Type	处理能力 Capacity (ton/day)	外形尺寸Dimensions L × W × H (mm)	重量 Weight (kg)
WOORIS00-65	10	750 × 850 × 1500	950
	15	850 × 850 × 1500	980
	20	950 × 850 × 1500	1020
WOORIS00-80	25	1150 × 850 × 1500	1070
	30	1250 × 850 × 1500	1100
	35	1450 × 850 × 1500	1140
WOORIS00-100	40	1650 × 850 × 1500	1180
	50	1750 × 850 × 1500	1210
	60	1850 × 850 × 1500	1240

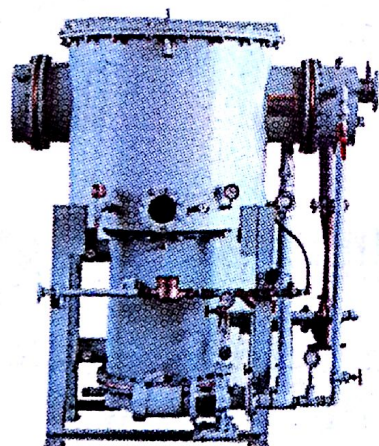

Code:195029

✱ 供应商: 3571

✱ Supplier: 3571

船用造水装置 Fresh Water Generator

型号 Type	10SK	15SK	20SK	25SK	25DK	30SK	30DK
额定造水量 Normal Capacity Rating(ton/day)	10	15	20	25		30	
额定盐分浓度 Capacity Normal Rating(ppm)	10						
冷却海水入口 Inlet of Cooling Sea Water(℃)	32						
冷却海水出口 Outlet of Cooling Sea Water(℃)	41.7	43.1	44.8	44.7	44.2	44.0	43.5
缸套水入口 Inlet of jacket Cooling Water(℃)	80						
缸套水出口 Outlet of jacket Cooling Water(℃)	71.0	69.7	70.4	69.2		70.0	