

Code:170106


☼ 供应商: 3086

☼ Supplier: 3086

起锚绞盘 Anchor Capsten

- 电动、液压、电动液压型式 Electric, hydraulic or electric hydraulic version
- 封闭式低座 Closed foundation

规格 Size(mm)	外形尺寸 Dimension (mm × mm)	总长 Total Length(mm)	功率 Power(kW)	重量 Weight(kg)
19-20.5	1170 × 810	1490	5	1300
22-24	1245 × 900	1595	6,5	1600
26-28	1380 × 990	1760	8,5	1900
30-32	1520 × 1100	1970	11	2800
34-38	1670 × 1200	2260	16	3500
40-44	1940 × 1400	2690	22	4200
46-50	2155 × 1500	3035	28	5100
52-56	2190 × 1600	3050	35	6600
58-62	2350 × 1700	3270	42	7600
64-70	2650 × 1800	3650	54	9000
73-81	3085 × 1950	4205	81	12200
84-92	3560 × 2100	4815	96	18000

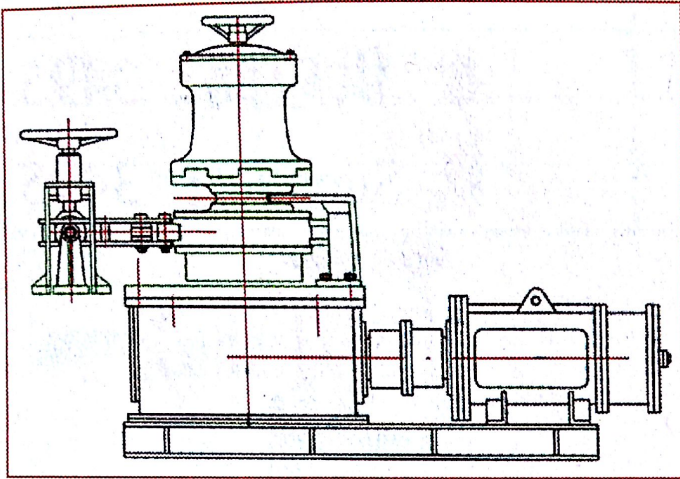

Code: I70107

☼ 供应商: 2297


☼ Supplier: 2297

电动起锚系统缆绞盘 Electric Mooring Rope Capstan

链径 Chain Dia.(mm)	工作负载 Working Load(kN)	起锚速度 Working Speed(r/min)	电机功率 Motor Power(kW)
12.5/14	5.9/7.4	≥12	4.3/1.7
12.5/14/16/17.5	5.9/7.4/10.9/13.0	≥12	8.5/3.5
19/22	15.3/20.6	≥12	8.5/3.5
26	28.7	≥9	11/11/7.5
28	33.3	≥9	16/16/11
30/32	38.3/43.5	≥9	16/16/11
34/36	49.1/55.1	≥9	22/22/16
38/40	61.4/68.0	≥9	22/22/16

DMCA电动系缆绞盘 Electric Mooring Capstan

型号 Type	电机功率 Motor Power(kW)	外形尺寸Dimension(mm)			整机重量 Weight(t)
		A	B	C	
DMCA-10	4.3/1.7	260	450	1325	0.68
DMCA-15	8.5/3.5	320	550	1450	0.85
DMCA-20	11/11/7.5	320	550	1495	0.92
DMCA-30	16/16/11	440	800	1850	1.75
DMCA-50	22/22/16	500	900	2000	2.15
DMCA-100	45/45/30	560	1000	2100	3.1

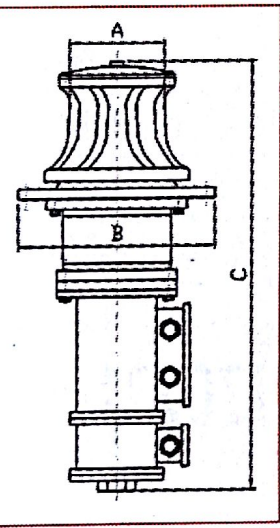


型号 Type	系缆负载 Warping Load(kN)	系缆速度 Warping Speed(r/min)	钢丝绳直径 Wire Rope Dia.(mm)
DMCA-10	10	15	11
DMCA-15	15	15	13
DMCA-20	20	15	15
DMCA-30	30	15	17.5
DMCA-50	50	15	20.5
DMCA-100	100	15	28

⚓ Notes: Certificate ABS, CCS, BV, DNV, GL, KR, LR, NK etc.

Code: 170218

⚓ 供应商: 2362


⚓ Supplier: 2362

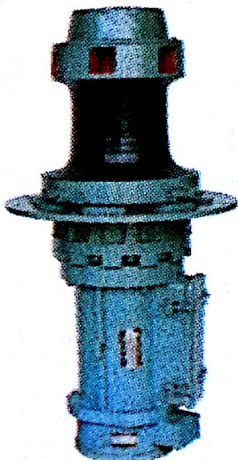

电动液压系统绞盘 Electro-hydraulic Steering Gears

系缆负载 Mooring Load (kN)	5 ~ 160
公称速度 Nominal Speed (r/min)	≥ 5
钢丝绳直径 Wire rope Dia. (mm)	9.3 ~ 37.5

⚓ Notes: Certificate CCS.

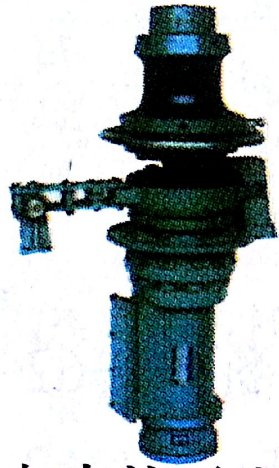

Code:170221

☼ 供应商: 2095


☼ Supplier: 2095

电动(液压)起锚系缆绞盘

Electric (Hydraulic) Anchor and Mooring Rope Capstan

链径 Chain Dia.(mm)	工作负载 Working Load(kN)	起锚速度 Working Speed(r/min)	系缆速度 Wrapping Speed(r/min)	钢索直径 Wire Rope Dia (mm)
12.5/14	5.9/7.4	≥12	≥10	φ 11
16/17.5	10.9/13.0	≥12	≥10	φ 13
19/22	15.3/20.6	≥12	≥10	φ 13
24/26	24.5/28.7	≥9	≥8.5	φ 15
28	33.3	≥9	≥8.5	φ 17.5
30/32	38.3/43.5	≥9	≥8.5	φ 17.5
34/36	49.1/55.1	≥9	≥8.5	φ 17.5
38/40	61.4/68.0	≥9	≥8.5	φ 20.5
42/44	75/82.3	≥9	≥8	φ 20.5

⚓ Notes: Certificate ABS, BV, CCS, DNV, GL, LR, NK, RINA.

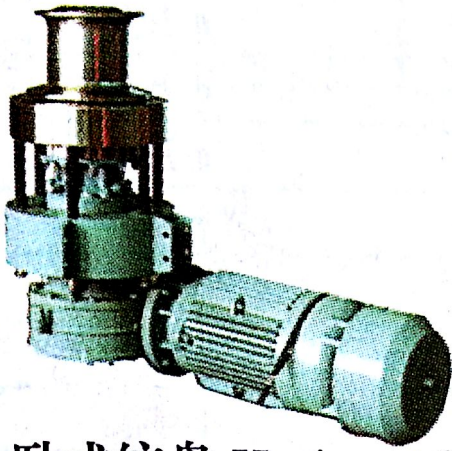

Code:170228



☼ 供应商: 3130

☼ Supplier: 3130

卧式绞盘 Horizontal Capstan

型号 Type	拉力 Pull(t)	功率 Power(hp)	绞缆速度Rope Speed(r/min)		外形尺寸 Dimension (mm)
			慢Slow	快Fast	
CAB 1000/OT/B	1	3	12	24	1040 × 560 × 1040
CAB 1500/OT/B	1.5	5.5	12	24	1060 × 560 × 1050
CAB 2000/OT/B	2	7.5	12	24	1100 × 600 × 1210
CAB 2500/OT/B	2.5	7.5	12	24	1220 × 660 × 1270
CAB 3000/OT/B	3	10	12	24	1220 × 700 × 1310
CAB 4000/OT/B	4	12.5	12	24	1820 × 800 × 1400
CAB 5000/OT/B	5	15	12	24	1370 × 800 × 1400
CAB 6000/OT/B	6	20	12	24	1370 × 800 × 1460
CAB 8000/OT/B	8	25	12	24	1570 × 860 × 1630
CAB 10000/OT/B	10	30	12	24	1650 × 960 × 1700
CAB 12000/OT/B	12	40	12	24	1850 × 1120 × 1960
CAB 15000/OT/B	15	50	12	24	1850 × 1120 × 1960
CAB 20000/OT/B	20	50	10	20	1850 × 1220 × 2010

↓ Notes: Certificate ABS, BV, DNV, GL, LR, RINA.

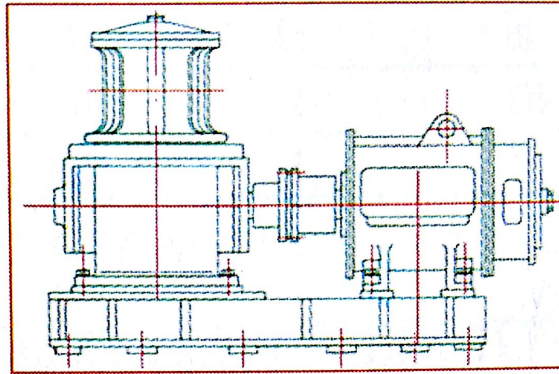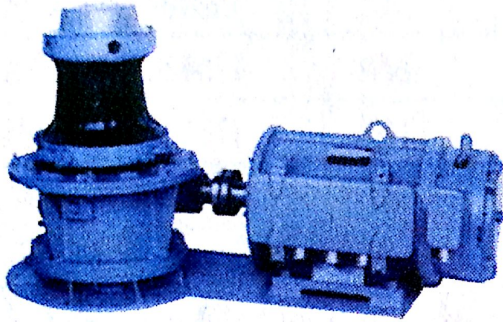

电动系缆绞盘 Electric Mooring Rope Capstan

名称 Name	系缆负载 Wrapping Load(kN)	系缆速度 Wrapping Speed(r/min)	钢索直径 Wire Rope Dia.(mm)	电机功率 Motor Power(kW)
SKN	5	≥18	Φ11	3/1.2
10KN	10	≥18	Φ11	4.3/1.7
15KN	15	≥18	Φ13	8.5/3.5
10-20KN	10/15/20	≥18	Φ15	11/11/7.5
30KN	30	≥18	Φ17.5	16/16/11
30-50KN	30/40/50	≥18	Φ20.5	22/22/16
50KN	50	≥16/18	Φ20.5	22/22/16
50-70KN	50/70	≥15	Φ26	30/30/22
100KN	100	≥15	Φ28	45/45/30
120KN	120	≥15	Φ32.5	60/60/45
150KN	150	≥15	Φ36.5	60/60/45